



Type	ELPM152050-01	ELPM1520380-02
Voltage	12 VDC	12 VDC
Resistance/phase at 25 °C	200Ω ±10%	200Ω ±10%
Step angle (2-2 exciting)	18	18
Phase	2	2
Exciting	2-2	2-2
Resistace	1:50	1:380
Pull in torque (200pps)	350 gf.cm	2000 gf.cm
No load pull in frequency	700 PPS	600 PPS
No load pull out frequency	1000 PPS	900 PPS
Insulation resistance (DC 500V)	≥100 MΩ	≥100 MΩ
Working temperature	-10 to 50°C	-10 to 50°C
Dielectric strength (600VAC, 1mA, 1s)	No breakdown No flashover	No breakdown No flashover

Rev	Modify details	Modified by/date
A		

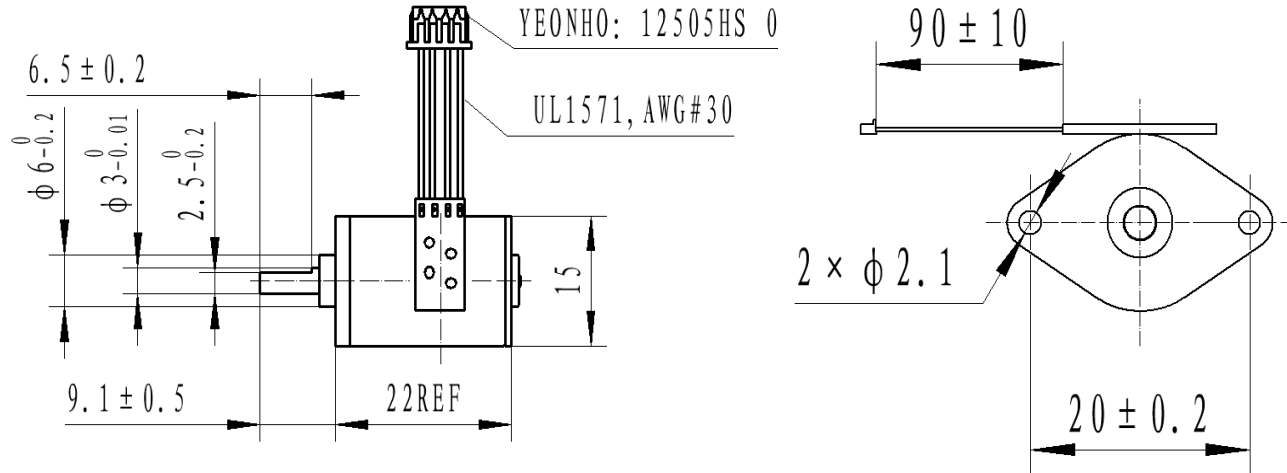

Project No.:	Part No.:	Material	REV
	ELPM1520		A
Description:		Weight	Scale
PM Motor		Design:	
ELMEQ www.elmeq.com		Approve:	



This drawing and its contents are the property of ELMEQ and must not be copied, reproduced, transmitted or disclosed to any third party without written consent of ELMEQ.