



Type	ELPM35354.2-01	ELPM353518-02
Voltage	24 VDC	24 VDC
Resistance/phase at 25 °C	7 Ω ±10%	7 Ω ±10%
Step angle (2-2 exciting)	7.5	7.5
Phase	2	2
Exciting	2-2	2-2
Resistace	1:4.2	1:18
Pull in torque (200pps)	500 gf.cm	1500 gf.cm
No load pull in frequency	500 PPS	500 PPS
No load pull out frequency	600 PPS	600 PPS
Insulation resistance (DC 500V)	≥100 MΩ	≥100 MΩ
Working temperature	-10 to 50°C	-10 to 50°C
Dielectric strength (600VAC, 1mA, 1s)	No breakdown No flashover	No breakdown No flashover

Rev	Modify details	Modified by/date
A		

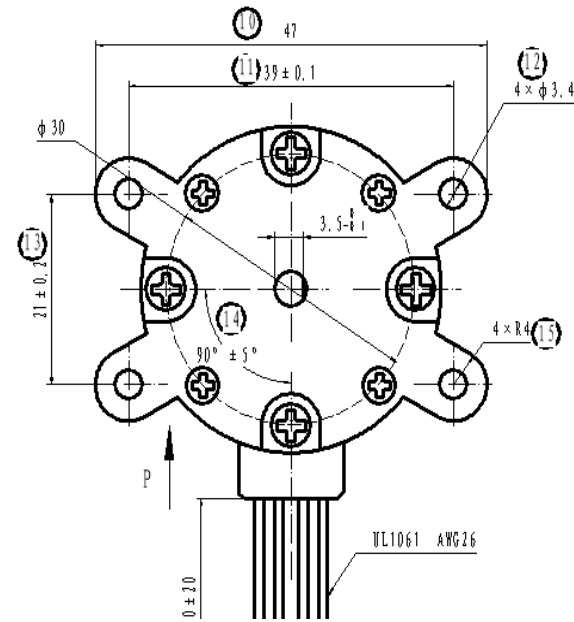

Project No.:	Part No.:	Material	REV
	ELPM3535		A
Description:		Weight	Scale
PM Motor			
		Design:	
		Approve:	
<b>ELMEQ</b> <a href="http://www.elmeq.com">www.elmeq.com</a>			

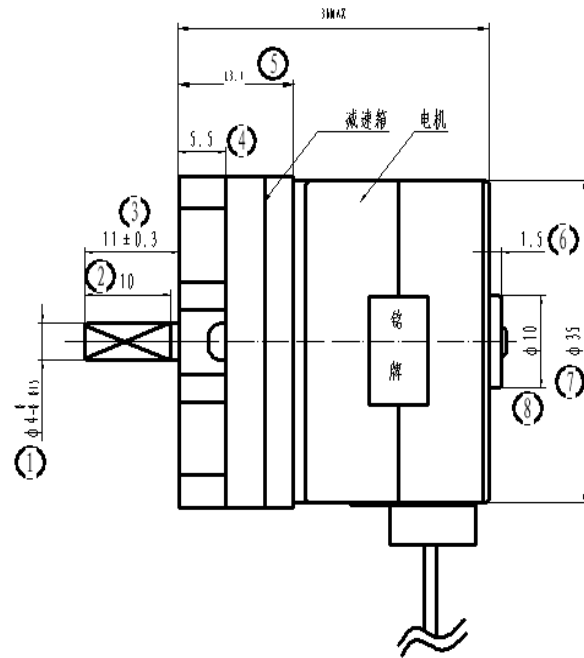

Tish drawing and its contents are the property of ELMEQ and must not be copied, reproduced, transmitted or disclosed to any third party without written consent of ELMEQ.